


Eco Worx®

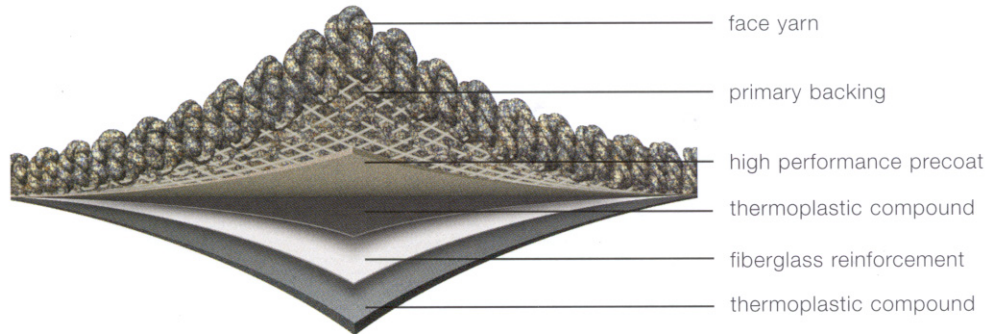

backing system	Ecoworx®
backing description	100% PVC –free recyclable backing system with recycled content, made from thermoplastic polyolefin compound with a reinforcing layer.
where	High performance environments requiring modular flooring.
why	<ul style="list-style-type: none"> • Thermoplastic alternative to PVC • Dimensional stability of PVC with 50% less weight • Superior delamination and edge ravel strengths to PVC • Lower VOCs and smoke density test results than PVC • 100% recyclable with recycled content and lower embodied energy than PVC
backing process	<p>5-step process</p> <ol style="list-style-type: none"> 1. Performance precoat for maximum tuft bind. 2. Thermoplastic laminate for superior delamination strength. 3. Fiberglass reinforcement for unmatched stability. 4. Final thermoplastic layer for added stability. 5. Die-cut into carpet tiles.
average thickness	.095 inch
primary	Synthetic
stabilizer	Fiberglass Mat
weight	75 oz/yd ² (average)
dimensions	24" x 24" (standard); optional sizes available

test	Radiant Panel Fire -Class 1 (based on pile construction) NBS Smoke < 450 TVOCs < 500 micrograms/sqm/hr (meets CRI Green Label requirements) Moisture barrier – 24 hr. British Spill
antimicrobial	FlorSept® system antimicrobial protection
installation	Full spread Shaw Sureset N5000 releasable adhesive Ecoworx ES, Shaw's environmental self-adhesive system
warranty	Lifetime commercial
shawcontractgroup.com	To download details on installation, specifications, and warranties on-line
shaw inforum	call 1.877.502.7429 for personal assistance